

W15 Specification Sheet

UVC Cleaning Systems Inc.® is proud to offer the most powerful surface mounted 253.7 nm decontamination device on the market. Our W15 is extremely effective at rapidly providing a clean environment with a proven reduction of 99.999% of pathogens.

Easy to install: The W15 is secured to a wall by an industry standard mounting bracket that is designed to attach to a wood stud, metal stud or masonry wall. Installs in minutes with all hardware is included and plugs into a standard power outlet.

Durable: Made of high impact thermal plastic, protective cage and light weight aluminum. UVC emitters are Teflon encapsulated to contain the glass and contents if damaged. Devices ship fully assembled and ready for duty.

Versatile: Designed to work with global electrical requirements coupled with multilingual labeling for domestic and international implementations.

Wireless Communication: Integrated wireless link of up to 8 units that can operate simultaneously to deliver a safe, fast, effective and scalable treatment in an enclosed space and diverse environments.


Easy to use: The W15 unit utilizes a very simple easy to use 3-button proprietary remote control that is universal between all UVC Cleaning Systems devices.

Intelligent: The device automatically determines the correct UVC dosage for a given area by measuring the accumulated UVC during the treatment, thus eliminating human error. UVC Cleaning Systems Inc.® also offers an electronic dosimeter, as well as a color changing ink dosimeter to help gauge your decontamination progress.

Data: All UVC Cleaning Systems Inc.® store treatment data on a memory card that can be easily downloaded into an Excel file.

Effective: The W15 provides the proven kill ratio of 99.993% Clostridium Difficile and 99.9992% Staphylococcus Aureus @ 16 ft.

Safe: Dual motion sensor technology creates a safe operating environment by preventing exposure to UVC light. UVC Cleaning system has engineered equipment that meets safety certifications for North America, Europe, Central America and parts of Asia.

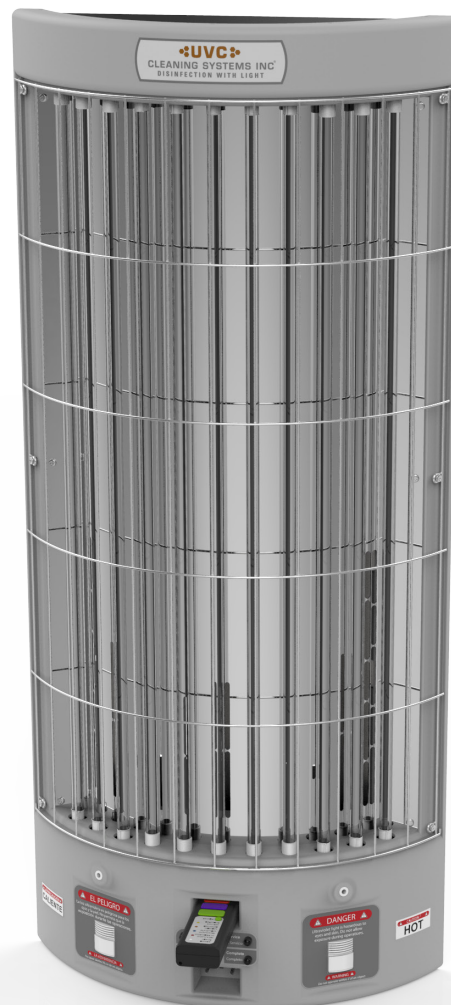

W15

Output: 1200 watts @ 120V

Electrical: 20VAC / 10A 60 Hz & 220-240VAC / 6A 50 Hz

Dimensions: 47.5H x 21.21"W x 6.25"D

Weight: 55 lbs.



Patent pending



EPA Est.
#91477-MI-001

W15 Specification Sheet

W15: A wall mounted plug-in UVC disinfection device that is able to link multiple units to increase room turnover. Enhanced disinfection is now possible quickly and effectively between every procedure.

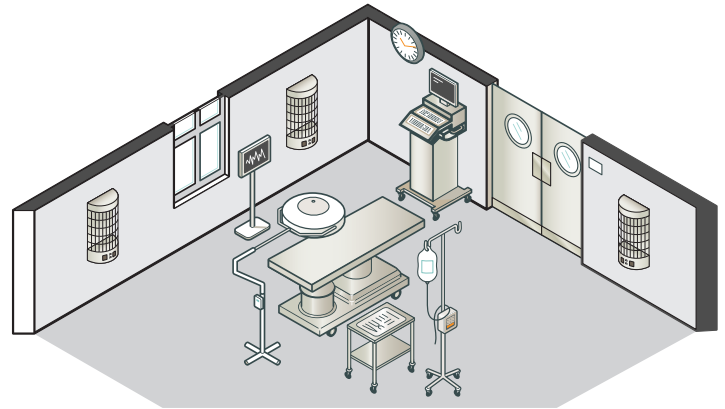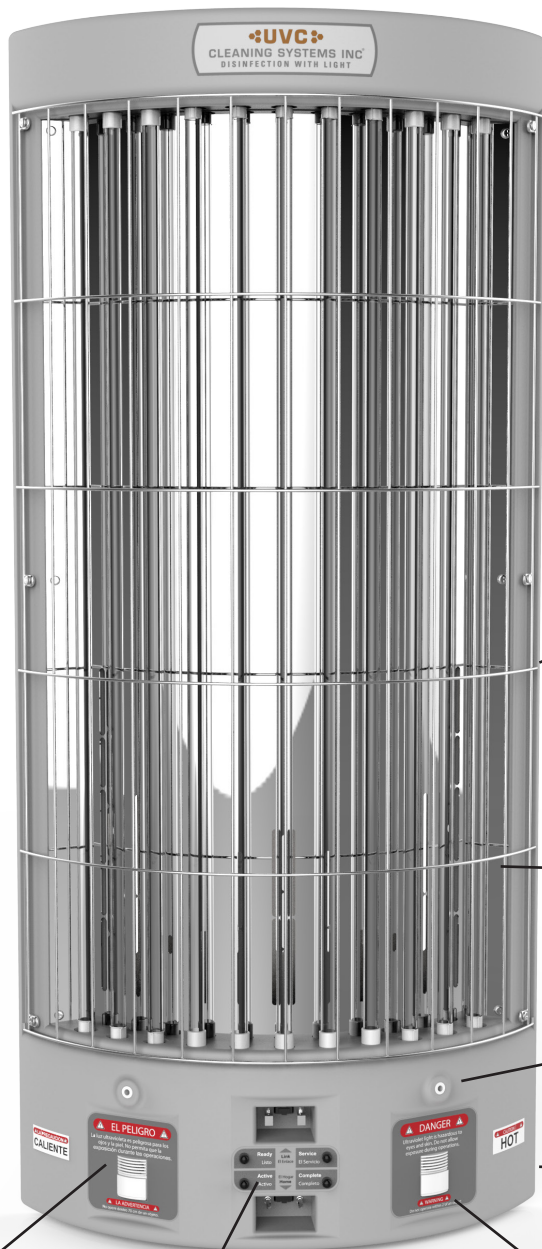

Operating Room

Stainless Steel
Cage

Eleven (11) Teflon Encapsulated
UVC Emitters

UVC Sensors

High Impact Plastic
& Aluminum

Multiple Language
Markings

LED Status
Indicators

Dual Technology
Motion Sensors

Regulatory
Approvals



EPA Est
#91447-MI-001

Model: W15-120
Model: W15-240